

Liviau S is a single-unit solution for control of lighting, audio distribution and video presentations for restaurants, bars, clubs, retail, or in any location where there is the need for a simple and elegant A/V control platform.

Liviau S combines the functions of a comprehensive lighting controller, a fully equipped audio mixer/processor, an audio/video file server and a stereo power amplifier in a single, compact and elegant unit. Liviau's time event scheduler enables the room to be fully automated.

The user interface is a 10.1" multi-touch screen, which displays a series of simple, icon-based pages. Each of these is deliberately designed to offer only the options required at any one time.

The touchscreen display may be mirrored to other portable devices using the build in Teamviewer® application, allowing the system to be controlled from elsewhere.

Liviau S connects to a flatscreen display or projector using HDMI.

Video may be sourced from a file stored in Liviau itself or from a USB memory device.

An external source of HDMI video (and audio) such as a DVD/DVR player or a decoder may alternatively be selected.

A comprehensive scheduler facility enables scheduling and playback of video files from stored sources, scheduling and/or activating a light CUE and/or GP outputs; ideal for use in retail outlets for example.

Operation is simple and straightforward via an uncluttered interface.

Liviau S's audio performance is exemplary: the unit provides six balanced analogue inputs (two mic, four line), six balanced analogue audio outputs, a fully assignable audio mixing matrix and a high quality 50 W/channel stereo power amplifier.

The outputs permit routing to four different stereo zones in the facility. A 4-band parametric equaliser is included on every input and output, and additionally, each output has a limiter and crossover facility, thus permitting the use of high quality bi-amped loudspeakers.

Master control of volume is always available with a virtual fader on all screen pages. A configurable 'Push to Talk' button permits either microphone to be routed directly to any, or all zones for relaying announcements. Using the music streaming application Spotify, the user has access to an enormous music library.

Liviau S features a fully integrated DMX controller for powerful and sophisticated lighting control. As well as architectural lighting, up to sixteen intelligent lighting devices may be controlled. Moving heads, strobes, RGB devices, lasers, dimmers and other DMX enabled devices are all controllable via the DMX512 control screens. In addition to the DMX controller, Liviau S also incorporates a programmable lighting mixer offering 24 cues, 16 fixtures, a sequencer with fade time and an effects generator with pan & tilt.

There are also six GPO's. These may be used to control Digital Voice Announcement systems for example.

Liviau S can be installed as a free-standing unit, integrated into furniture or wall-mounted. It is built in a very stylish, custom aluminium enclosure, and includes an ambient light sensor to adjust screen brightness and a proximity sensor to wake the system. Liviau S is silent in operation (no fans) and is powered by a separate external 24 V PSU (supplied).


## Primary Details

- "All-in-one" unit – no separate processor
- Extremely simple in use
- Cost-effective solution
- Contemporary design, ideal for today's working environment


## Features

- Video, light CUE and GPO scheduling
- DMX 512 control for intelligent lighting and dimmer packs
- Lighting effects controller
- Very high level of audio performance
- Balanced audio inputs for mics and line sources
- Multi-zone balanced outputs
- Integral 50 W/ch stereo amplifier
- Powerful audio DSP section
- Internal memory for commonly-accessed data
- USB port
- Wi-Fi enabled
- Network port
- Spotify® integration
- HDMI input and output
- Control support for all common flat screen displays and projectors
- GPO ports
- Silent in operation: very low power consumption (12W)

## Example System Diagram

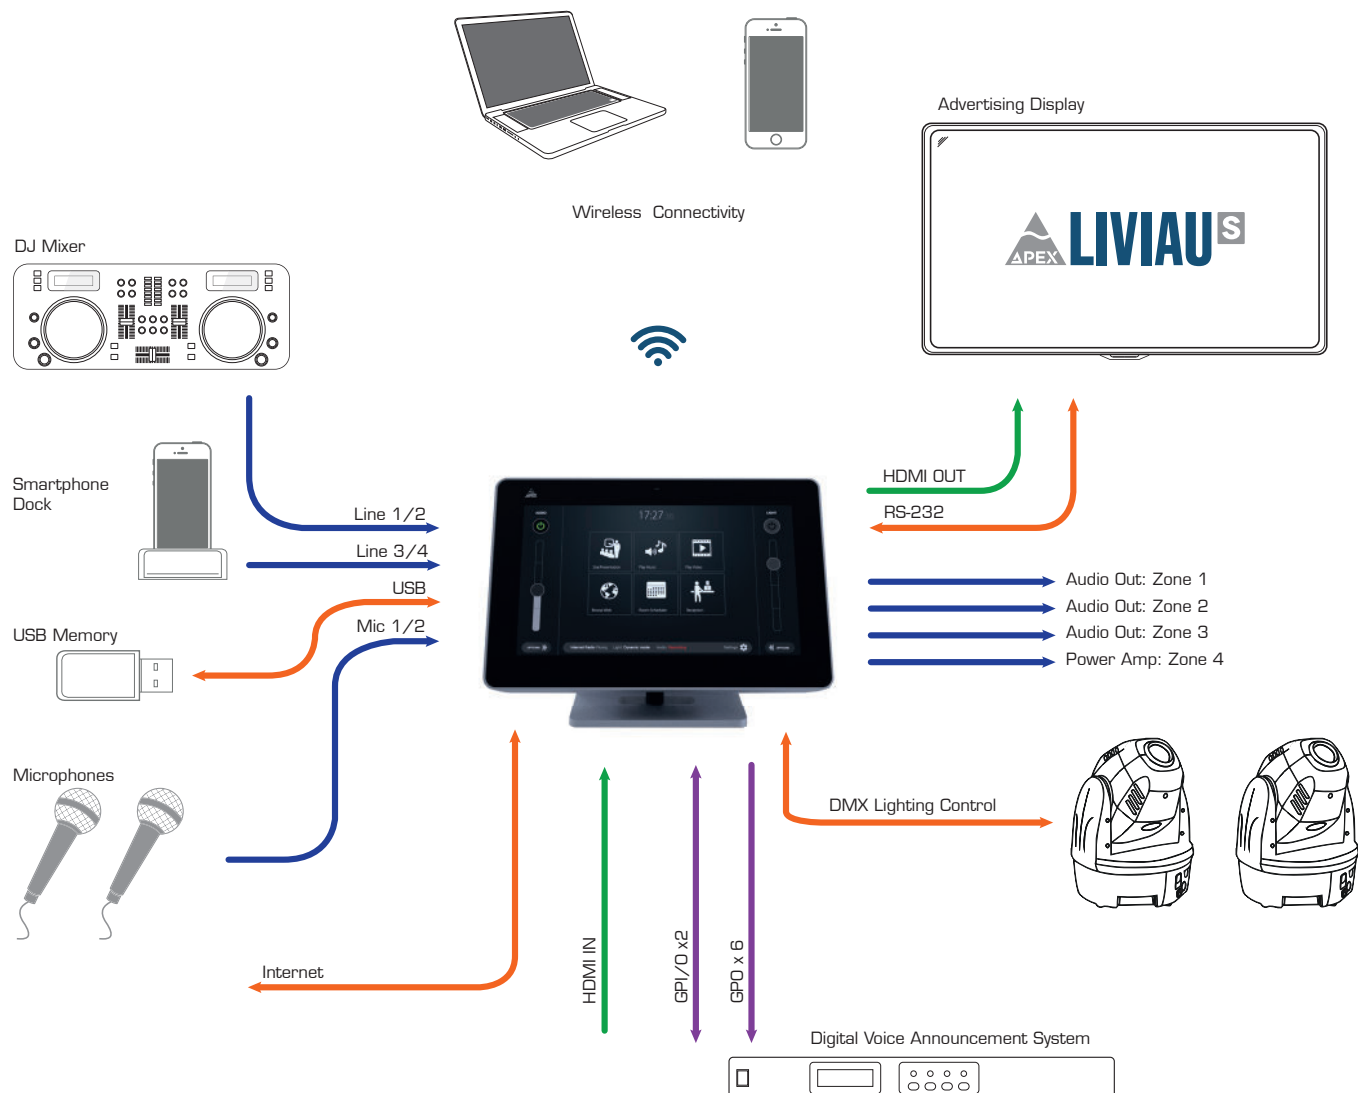


## Connector Diagram

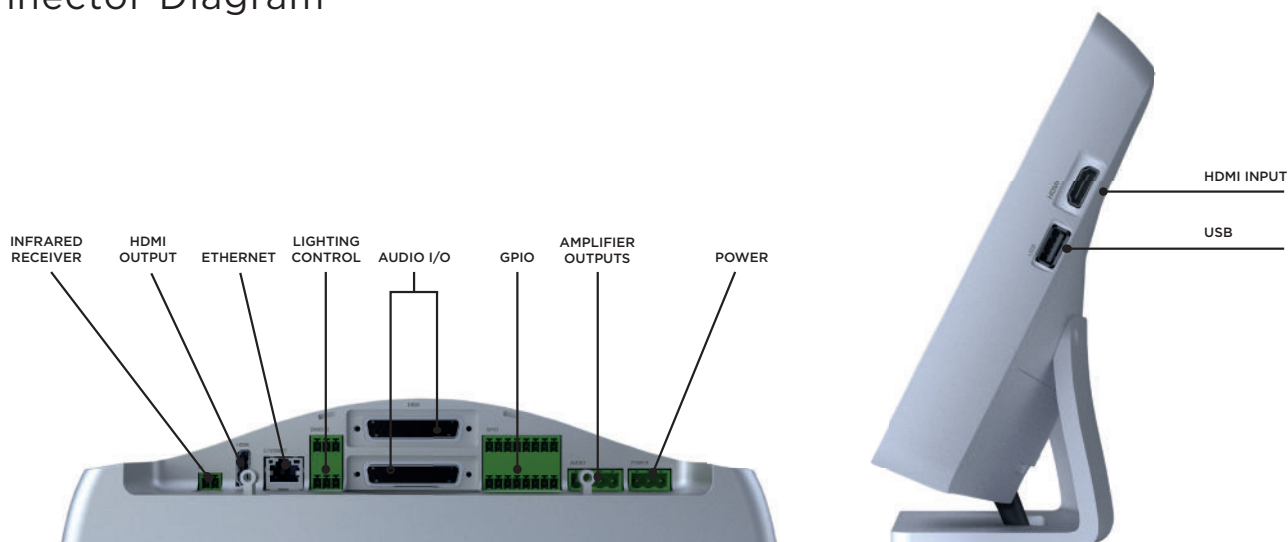

## Sample Control Displays


### Home Screen

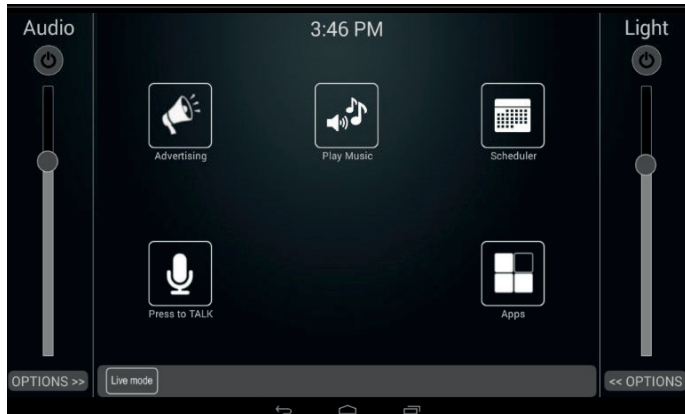


### Advertising




### Play Music

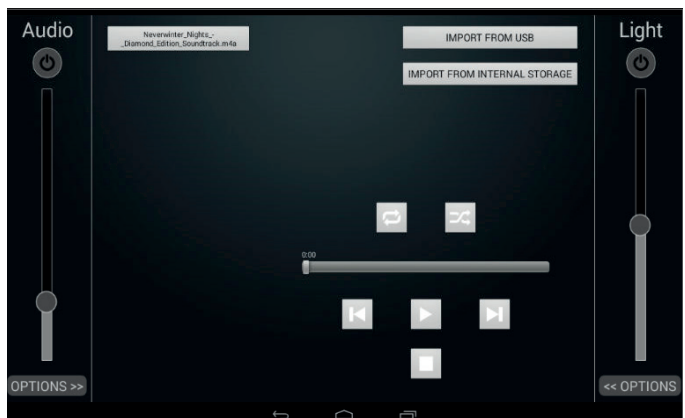


### Scheduler - Time Events

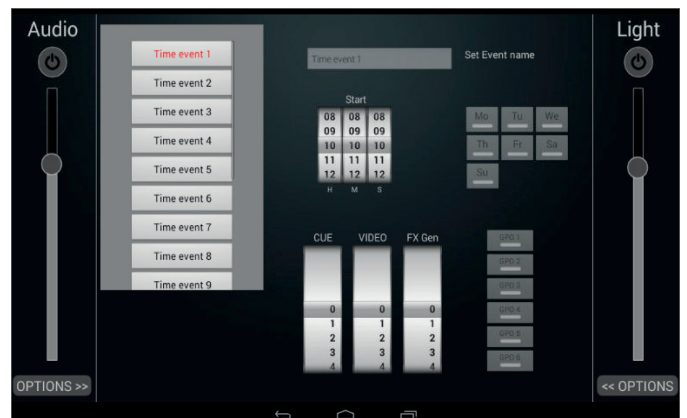

### Apps - Spotify

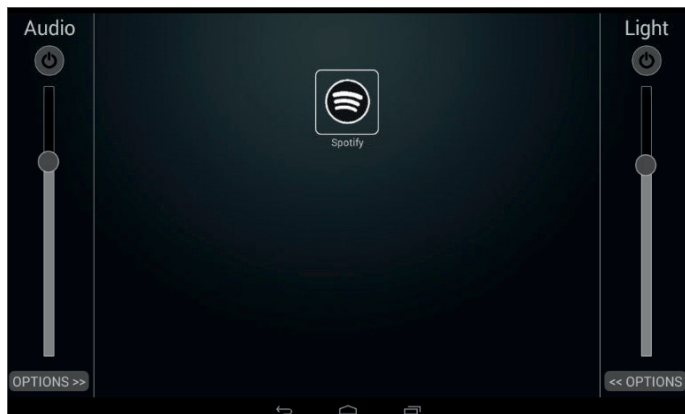

### Light options - CUE's

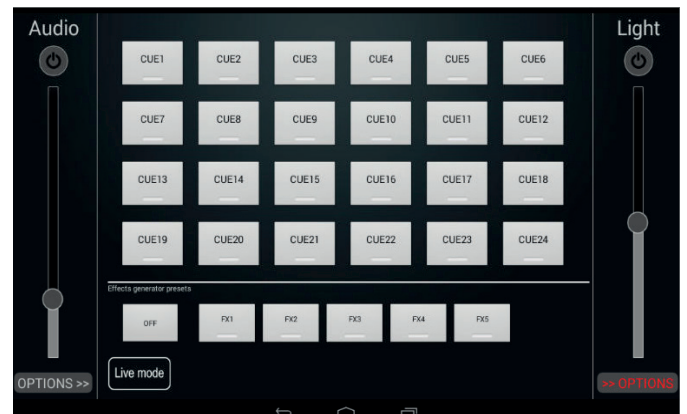

## Technical Specifications

General	
Display	10.1" multi-touch capacitive screen; ambient light sensor for backlight control
Cooling	Passive
Processor	Quad core Cortex A9
Comms	
Network	Gigabit Ethernet port
USB	1 x USB Type 'A'
Wi-Fi	Compliant with 802.11 a/b/g/n, 2.4/5.0 GHz MIMO
Video	
Input	1 x HDMI 1.4a, 1920 x 1080p
Output	1 x HDMI 1.4a
Audio - I/O	
Mic inputs - type	2 x balanced, $Z_{in} > 10 \text{ kohms}$
Line inputs - type	4 x balanced, $Z_{in} > 5 \text{ kohms}$
Max input level	+18 dBu (mic and line)
Line outputs - type	6 x balanced, $Z_{out} < 50 \text{ ohms}$
Max. output level	+18 dBu (line outs)
Power amplifier outputs	2 x 50 W into 4 ohms
Audio - processing	
Sample rate	96 kHz
Matrix	6 x 6
EQ	4-band parametric on all inputs and outputs
Limiters	On all outputs
Crossovers	On all outputs
Recorder	24-bit, 48 kHz; 128 kbps AAC. Max duration approx. 500 hours (internal)
Other I/O	
Lighting control	DMX 512
GPOs	Six, volt-free, 24 V @ 100 mA
Other	
Wake up	By proximity sensor
Power requirements	24 V dc @ 6 A max., via supplied AC PSU
Dimensions (w x h x d)	273 mm x 177 mm x 60 mm (without stand)

GiVa Audiovisual Technologies BVBA - Belgium  
[www.apex-liviau.com](http://www.apex-liviau.com)  
[info@apex-liviau.com](mailto:info@apex-liviau.com)  
Tel: +32 11 21 24 32

\* Apex, Apex Liviau and Apex Liviau R are brands of GiVa Audiovisual Technologies